


6 zone 130W/260W/360W Mixer Power Amplifier with USB/Bluetooth/Tuner/TF Card

DK-FW2130/DK-FW2260/DK-FW2360

Features:

- ◆ 6 zones with independent volume controller to each zone
- ◆ 3 microphone and 2 auxiliary inputs
- ◆ 100V, 70V and 4-16 Ohms transformer-isolated speaker outputs
- ◆ Automatic mute function for paging and announcements
- ◆ With built-in audio source inputs like USB / Bluetooth / Tuner / TF Card

Connection Schematic

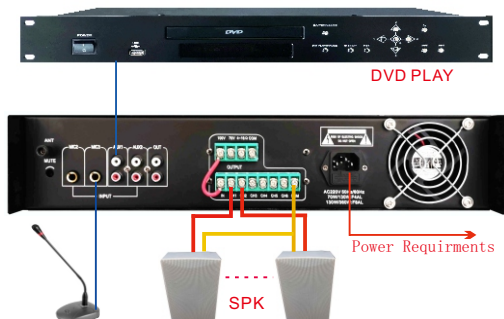

FM radio, BlueTooth, USB & TF card memory interface, AUX inut, IR Remote control



Technical Specification

Model	DK-FW2130	DK-FW2260	DK-FW2360
Rated Power Output	130W	260W	360W
Amplification	Analog 70V Transformer Type		
Output	100V, 70V and 4-16 Ohms		
Frequency Response	60 - 15KHz, +/- 3dB		
THD	Less than 0.5% at 1KHz (1/3 Rated Power)		
S/N Ratio	Better than 85dB		
VOL Range	BASS: 100Hz (± 10dB), TREBLE: 12kHz (±10 dB)		
Controls	Volum control and power switch		
Cooling	Internal 12VDC fan		
Indicators	Power and Level Indicators		
Power Consumption	260W	340W	480W
Power Requirments	220V AC, 50/60 Hz		
Dimensions	89(H) x 483(W) x 366(D) mm		
Built-in Dimensions	2 U rack 19 inch		
Carton Dimensions	185(H) x 520(W) x 435(D) mm		
Net Weight	11.00 kg	14.00 kg	17.00 kg
Finish	Panel: aluminium, black Case: steel plate, black		